


- ▶ Dual-channels 200kHz
- Multi-installation modes
- Modern panel easy control
- Mininum detectable depth 0.3m

7 inch TFT Dual-channels Sounder

Item	Specification	Item	Specification
Frequency	Dual-channel 200kHz	Alarm Types	Shallow
Range	2.5~200m	Alarm Beeper	Buzzer(switch able),flashing
Auto Range	Yes	Power supply	DC24V (19~33V), <20W
Min Depth	0.3m	Temperature	0~50°C, IEC 60945
Output Power	300W	Water Proof	IP52, IEC 60529
Echo Levels	8 colors signal levels	Weight	1.5kg
Time Scale	On screen 30s time scale	Measurement	188(W)164(H)65(D)mm



◆ 安装说明

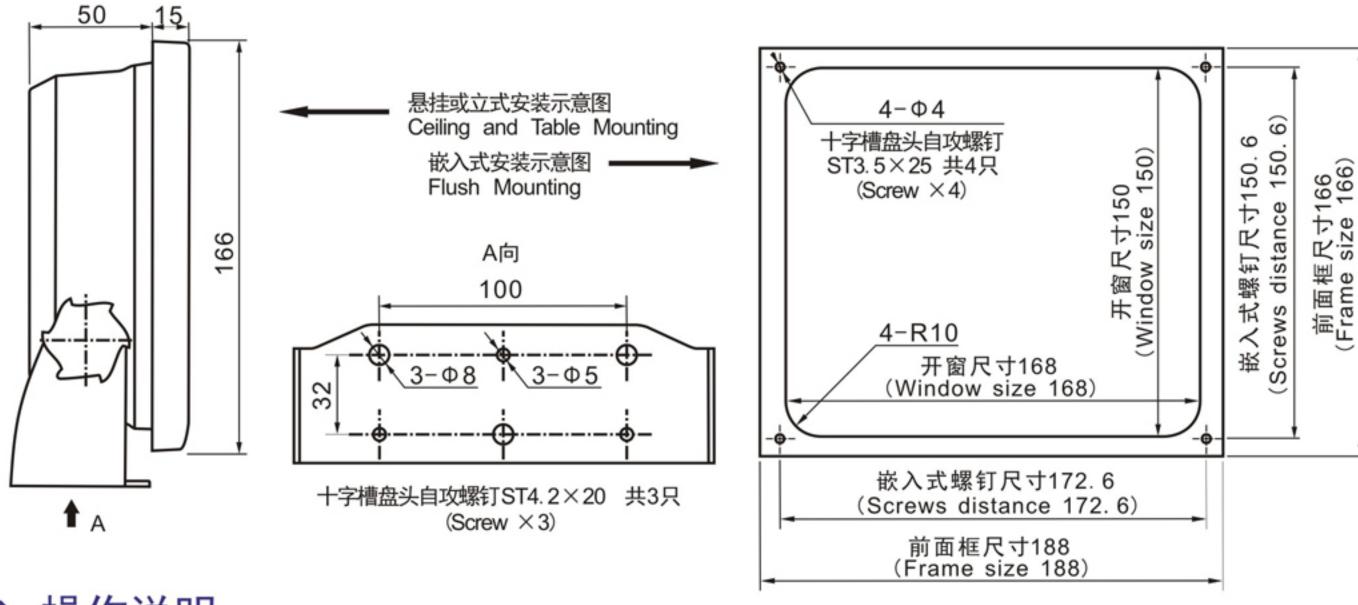

◆ 操作说明



BRIGHTNESS [Adjust the LCD brightness (LCD backlight)

GAIN In single channel model, set gain by pressing 【Gain ◀】 & 【Gain ▶】 directly.

In dual channel model, using 【Memu】 to adjust gain value.

RANGE Press [Range] & [Range] directly to adjust basic depth range, while the Auto

range is off (set in menu)

MODE Press [Mode] repeatedly to choose among three display model: Channel 1,

Channel 2, Dual-channel.

MOVE The picture speed function is to set the screen frame rolling speed based on per ping of

transmissin. Press [MOVE] repeatedly to choose among speed: 1/4 \, 1/2 \, 1/1 \, 2/1 \, 4/1

MENU Press 【MENU】 into menu. 【▲】: UP 【▼】: DOWN

【◀】: LEFT 【▶】: RIGHT

GAIN_1	[01]	Gain for channel 1: 01-20	
GAIN_2	[01]	Gain for channel 2: 01-20	
ALARM	[5.5]	Set alarm depth: OFF/0.4-10	
BUZZER	[ON]	ON/OFF	
LEVEL	[8]	Set echo colors: 3-8	
Auto	[OFF]	Auto range: OFF, Track 1 (channel 1), Track 2 (channel 2) When auto range is on, range can not be adjusted manually.	
Power	[BIG]	Power output: BIG/ SMALL	
Press [OK] to quit		Save all setting and quit from menu	