

Westerbeke Marine Engines & Generators

Universal Marine Engines

Rotary Aire Marine Climate Control Systems



D-NET™: The first generators available fully networked to NMEA 2000®


Some luxuries remain exclusive

Westerbeke Marine Diesel Generator Sets

For the Leisure and Professional Boating Industry, Westerbeke produces high quality marine generator sets from 5.5kW up to 33.0kW at 60 Hertz and 5.0kW up to 26.0kW at 50 Hertz.

Westerbeke 1800/1500-rpm diesel generators are backed by a 5-year limited warranty. The presence of Westerbeke in over 65 countries around the world provides customers with easy access to parts and technical support.

Established in 1937, Westerbeke is committed to providing its customers with quality products and unequalled after sales support.

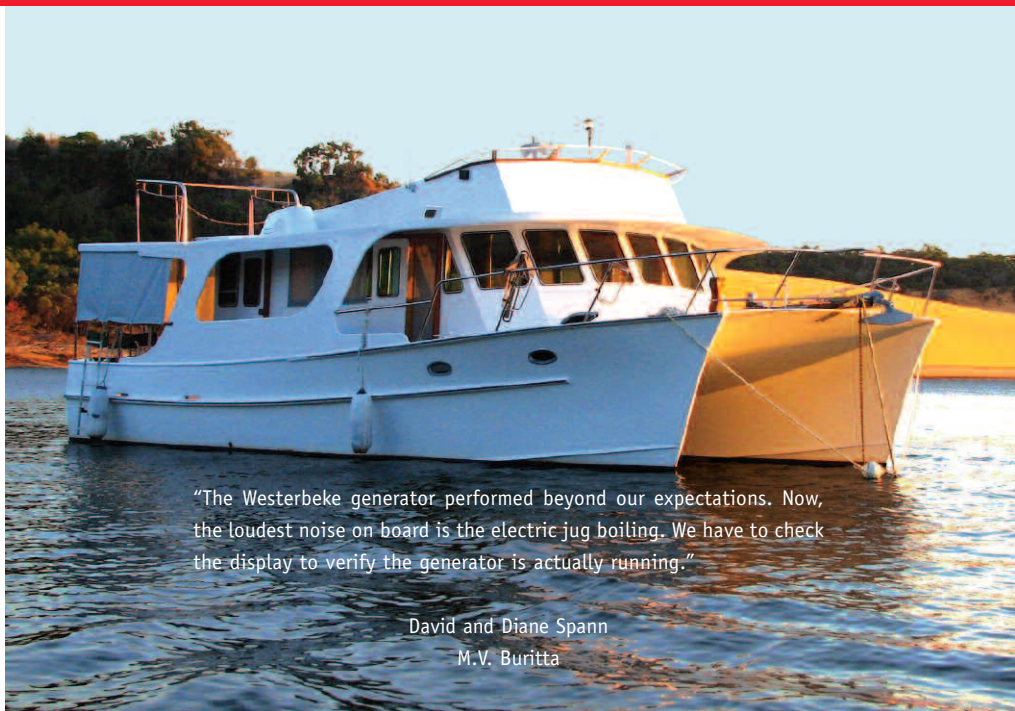

"The Westerbeke generator performed beyond our expectations. Now, the loudest noise on board is the electric jug boiling. We have to check the display to verify the generator is actually running."

David and Diane Spann
M.V. Buritta

D-NET™ ELECTRONIC DIESEL GENERATORS

With standard Westerlink™ or optional NMEA 2000® compliant databus communication.

Sample network with Westerlink™ generator





Westerlink™ Main Advantages

Westerlink™ allows the Westerbeke generator and several Westerbeke displays to communicate via the same digital databus cable. This permits boat builders to significantly reduce both labor and space normally required to run multiple cables throughout the vessel and eliminates unnecessary weight. Westerlink™ also allows a Westerbeke generator to communicate with a Westerbeke display at a far greater distance than previously possible.

Optional NMEA 2000® Main Advantages

Same as above except the digital databus cable facilitating communication can be shared by Westerbeke and other NMEA 2000® certified equipment installed on the vessel. This may result in a significant cost reduction as multiple cables and/or harnesses are eliminated. In addition, the Westerbeke generator may be used as the power supply for the NMEA 2000® network.

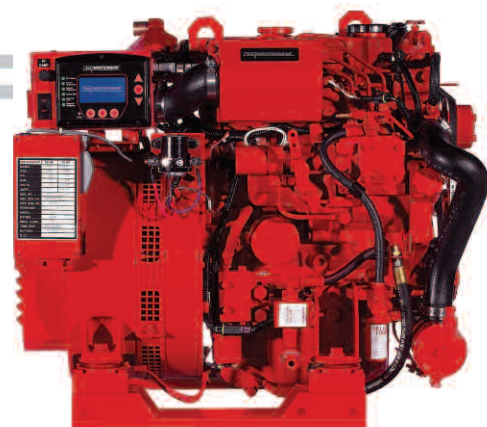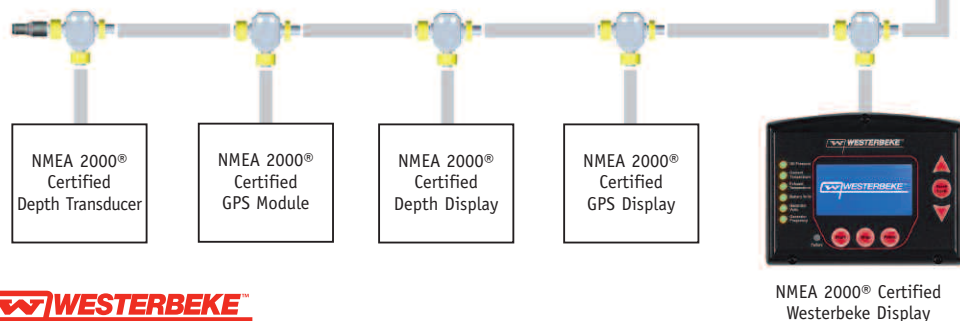

Standard D-NET™ Features

- Digital display and diagnostics panel
- Electronic governing
- Safety shut-downs: overspeed, underspeed, low oil pressure, high exhaust and high coolant temperature
- AC circuit breaker or field breaker
- Battery charging alternator
- Power take-off interface
- Self-bleeding fuel system on most models
- Fresh water cooling
- Water injected exhaust elbow
- Raw water pump
- Tuned air intake silencer
- Slow-speed, quiet operation
- Anti-vibration mounts
- Lube oil drain hose and drip tray
- Operators' manual & parts list
- 5-year limited warranty

Optional Equipment

- NMEA 2000® compliant databus communication
- Remote digital display(s)
- Remote start-stop(s)
- Sound Guard SST
- Ungrounded electrical system (above 5.5/5.0kW)
- 24V electrical system (above 7.6/5.7kW)
- 24V ungrounded electrical system (above 7.6/5.7kW)
- Keel cooling
- Dry exhaust
- PTO adapter kit (up to 15.0/12.0kW)
- PTO and electric clutch (above 15.0/12.0kW)
- Fuel/water separator
- Hydro-Hush muffler and fittings
- Spare parts kits
- Anti-siphon valve with 1" stainless loop for overboard cooling discharge water
- Ship to shore switch
- Technical manual
- White paint (standard color red)



Sound Guard SST

Features stainless steel base and frame with powder coated aluminum panels providing exceptional corrosion resistance.

Digital Display


Features LED's for quick operational status and an LCD to provide more detailed operational information.

Technical Data, D-NET™

		Optional NMEA 2000® certification available.													
Model		5.5 EDC	5.0 EDC	7.6 EDT	5.7 EDT	8.0 EDT	6.0 EDT	10.0 EDT	7.5 EDT	11.5 EDT	9.2 EDT	12.5 EDT	9.4 EDT	15.0 EDT	12.0 EDT
Output	kW	5.5	5.0	7.6	5.7	8.0	6.0	10.0	7.5	11.5	9.2	12.5	9.4	15.0	12.0
Cylinders		3		3		3		3		3		4		4	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency	Hz	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Power Factor		1.0		1.0		1.0		1.0		1.0		1.0		1.0	
Standard Phase		1		1		1		1		1		1		1	
Optional Phase		No		No		No		3		3		3		3	
Dimensions,		GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST
Length	inch	27.8	33.3	28.2	33.3	28.6	36.1	31.7	36.1	31.7	36.1	35.2	39.5	35.2	39.5
Width	inch	18.5	21.1	19.0	21.1	18.6	23.2	19.1	23.2	19.1	23.2	19.1	23.2	19.1	23.2
Height	inch	20.6	22.3	21.2	22.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3
Dry Weight	lbs	373	451	407	485	477	567	520	610	520	610	580	674	588	682
Length	mm	706	846	716	846	726	917	805	917	805	917	894	1003	894	1003
Width	mm	470	536	483	536	472	589	485	589	485	589	485	589	485	589
Height	mm	523	566	539	566	610	643	610	643	610	643	610	643	610	643
Dry Weight	kg	169	205	185	220	216	257	236	277	236	277	263	306	267	310

		Optional NMEA 2000® certification available.							
Model		17.0 EDE	13.5 EDE	22.0 EDE	17.0 EDE	28.5 EDEA	23.5 EDEA	33.0 EDEA	26.0 EDEA
Output	kW	17.0	13.5	22.0	17.0	28.5	23.5	33.0	26.0
Cylinders		3		4		4		4	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120/240	230	120/240	230	120/240	230	120/240	230
Frequency	Hz	60	50	60	50	60	50	60	50
Power Factor		1.0		1.0		1.0		1.0	
Standard Phase		1		1		1		1	
Optional Phase		3*		3*		3		3	
Dimensions,		GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST
Length	inch	35.9	45.0	39.9	45.0	46.2	50.7	46.2	50.7
Width	inch	23.4	26.0	22.4	26.0	22.8	27.2	22.8	27.2
Height	inch	25.7	27.0	25.4	27.0	28.6	30.8	28.6	30.8
Dry Weight	lbs	794	914	829	954	1135	1285	1135	1285
Length	mm	912	1143	1014	1143	1174	1288	1174	1288
Width	mm	594	660	569	660	579	691	579	691
Height	mm	653	686	645	686	726	782	726	782
Dry Weight,	kg	360	415	376	433	516	584	516	584

Note: The digital display must NOT be mounted on the generator set when installed inside a Sound Guard SST. In this application, one option is to remote mount the digital display. Another is to mount the display on the Sound Guard SST which is optional for all D-NET™ models except the 17.0/13.5 EDE & 22.0/17.0 EDE.

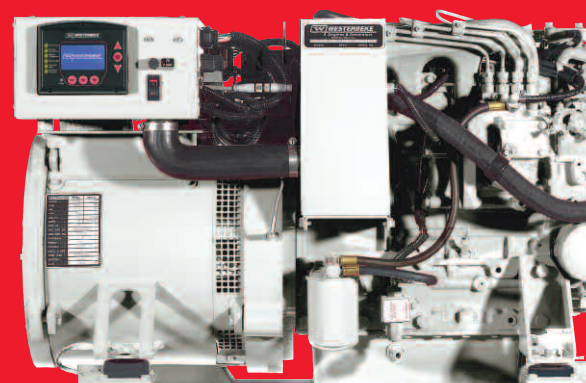


Specifications subject to change without notice. GEN GENERATOR SST with SOUNDGUARD SST
* Contact factory for weight and dimensions at 3 phase.

Providing Reliable Power for Military, Government, Commercial and Pleasure Applications



GOLD MEDAL PERFORMANCE
COMES IN WESTERBEKE RED



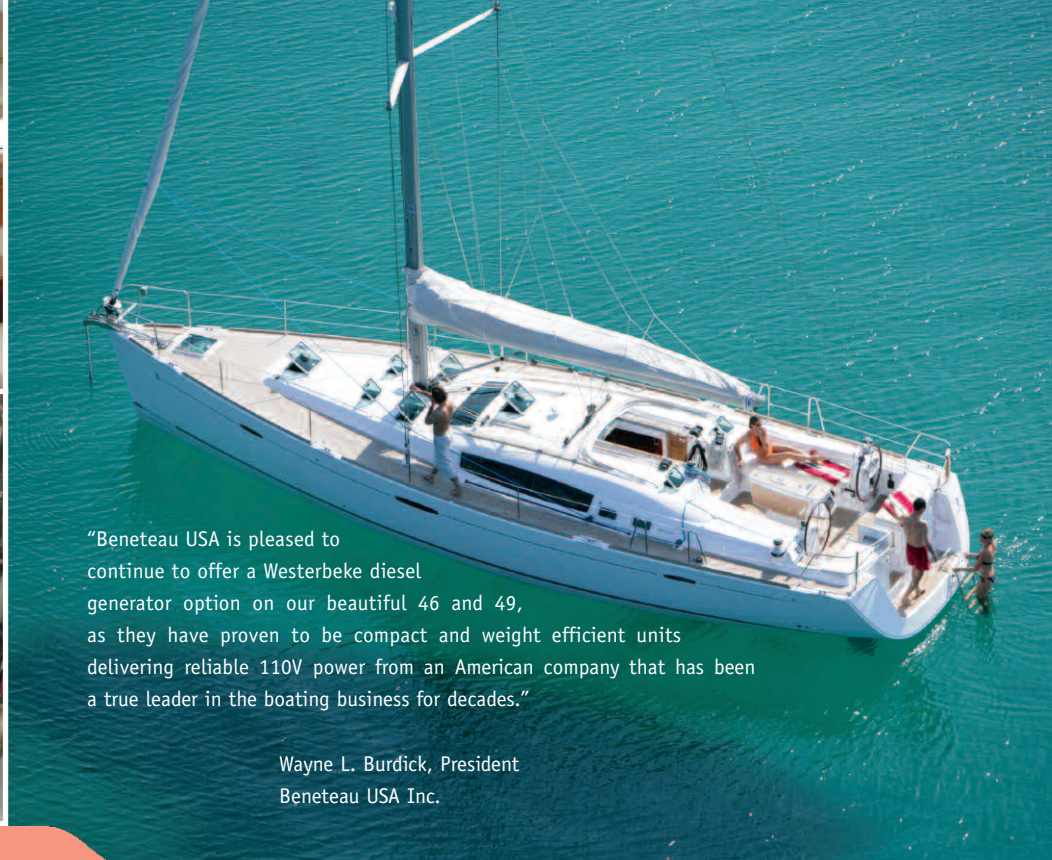

"Beneteau USA is pleased to continue to offer a Westerbeke diesel generator option on our beautiful 46 and 49, as they have proven to be compact and weight efficient units delivering reliable 110V power from an American company that has been a true leader in the boating business for decades."

Wayne L. Burdick, President
Beneteau USA Inc.

Technical Data, analog

Model		5.5 BCD	5.0 BCD	7.6 BTD	5.7 BTD	8.0 BTDA	6.0 BTDA	10.0 BTDA	7.5 BTDA	11.5 BTD	9.2 BTD	12.5 BTDB	9.4 BTDB	15.0 BTDC	12.0 BTDC
Output	kW	5.5	5.0	7.6	5.7	8.0	6.0	10.0	7.5	11.5	9.2	12.5	9.4	15.0	12.0
Cylinders		3		3		3		3		3		4		4	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency	Hz	60	50	60	50	60	50	60	50	60	50	60	50	60	50
Power Factor		1.0		1.0		1.0		1.0		1.0		1.0		1.0	
Standard Phase		1		1		1		1		1		1		1	
Optional Phase		No		No		No		3		3		3		3	
Dimensions,		GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST	GEN	W/SST
Length	inch	27.8	33.3	28.2	33.3	28.4	36.1	31.5	36.1	31.5	36.1	35.0	39.5	35.0	39.5
Width	inch	16.3	21.1	19.0	21.1	18.6	23.2	19.1	23.2	19.1	23.2	19.1	23.2	19.0	23.2
Height	inch	20.7	22.3	20.7	22.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3	24.0	25.3
Dry Weight	lbs	356	427	395	466	467	550	513	596	513	596	561	648	569	656
Length	mm	706	846	716	846	722	917	800	917	800	917	889	1003	889	1003
Width	mm	422	414	483	536	473	589	485	589	485	589	483	589	483	589
Height	mm	526	566	526	566	610	643	610	643	610	643	610	643	610	643
Dry Weight	kg	162	194	179	202	212	250	233	270	233	270	255	294	258	298

Specifications subject to change without notice.

GEN GENERATOR

SST with SOUNDGUARD SST



Standard Features

- Instrument panel and safety stop switch
- Remote start-stop plug-in connection
- Safety shut-downs: low oil pressure, high exhaust and high coolant temperature
- AC circuit breaker (single phase)
- 50 amp battery charging alternator (above 5.5/5.0kW)
- Power take-off interface
- Self-bleeding fuel system
- Fresh water cooling
- Water injected exhaust elbow
- Raw water pump
- Tuned air intake silencer
- Slow-speed, quiet operation
- Anti-vibration mounts
- Lube oil drain hose and drip tray
- Operators' manual & parts list
- 5-year limited warranty



Optional Equipment

- Remote instrument panel(s)
- Remote start-stop panel(s)
- Sound Guard SST
- Ungrounded electrical system (above 5.5/5.0kW)
- 24V electrical system (above 7.6/5.7kW)
- 24V ungrounded electrical system (above 7.6/5.7kW)
- Keel cooling
- Dry exhaust
- PTO adapter kit
- Fuel/water separator
- Hydro-Hush muffler and fittings
- Spare parts kits
- Anti-siphon valve with 1" stainless loop for overboard cooling discharge water
- Ship to shore switch
- Technical manual
- White paint (standard color red)

Sound Guard SST

Strong, silent, timesaving, & made of the finest materials, the Westerbeke Sound Guard SST is designed for rugged service and is easy to install.

Engineered for silent operation

The Sound Guard SST enhances your offshore boating experience. Keeping your generator set to a whisper, it allows you to enjoy the pleasure of boat ownership in the quiet of your favorite cove. Experience engineering excellence and a new standard of quality that is unheard of. Available for 5.0–33.0kW diesel models, the Sound Guard SST further reduces the average sound intensity of a generator set up to 50% so you can forget you have one operating.

Serviceability is a snap

To remove any side or end panel requires only a quick snap of 2 latches and you have full access to all four sides. Westerbeke Sound Guards have always been famous for ease of serviceability and now have managed to create an even higher standard. Two access doors are also provided on the service side panel.

Pre-connected for ease of installation

The top panel can be removed in seconds for access to lifting eyes. The base and frame contain bulkhead fittings for all the generator's external connections including the raw water line, siphon break, fuel lines, exhaust line, AC wiring and battery cables. Westerbeke supplies the necessary hoses, cables and hardware to make these connections, allowing quick and easy "plug & play" installations. Only a flat-head screwdriver is required to assemble the frame - the panels require no assembly. Or you can order your new Westerbeke diesel pre-installed in the Sound Guard SST.



Materials are of the highest quality


The Sound Guard SST consists of 5 powder coated aluminum panels and stainless steel base and frame. The powder coated aluminum panels provide optimum corrosion resistance while reducing the weight of the enclosure. The frame (where attached to the base) and base are likely to be subjected to the most moisture; therefore, are of stainless steel, a highly corrosion resistant metal. Even the rivets and fasteners are of stainless steel. The top panel also covers the side panels to lessen the likelihood that moisture will enter the Sound Guard SST.

Strong, sturdy and rugged

The Sound Guard SST is designed for tough duty. While not recommended to kneel or stand on the unit, some may ignore warnings and do just that. The thick frame and sturdy panels result in a very robust enclosure.

Stylish appearance

The Sound Guard SST is designed to please the eye and resist the corrosion process that age many sound enclosures before their time. Westerbeke believes each customer should be proud of any product's appearance well after the initial purchase.

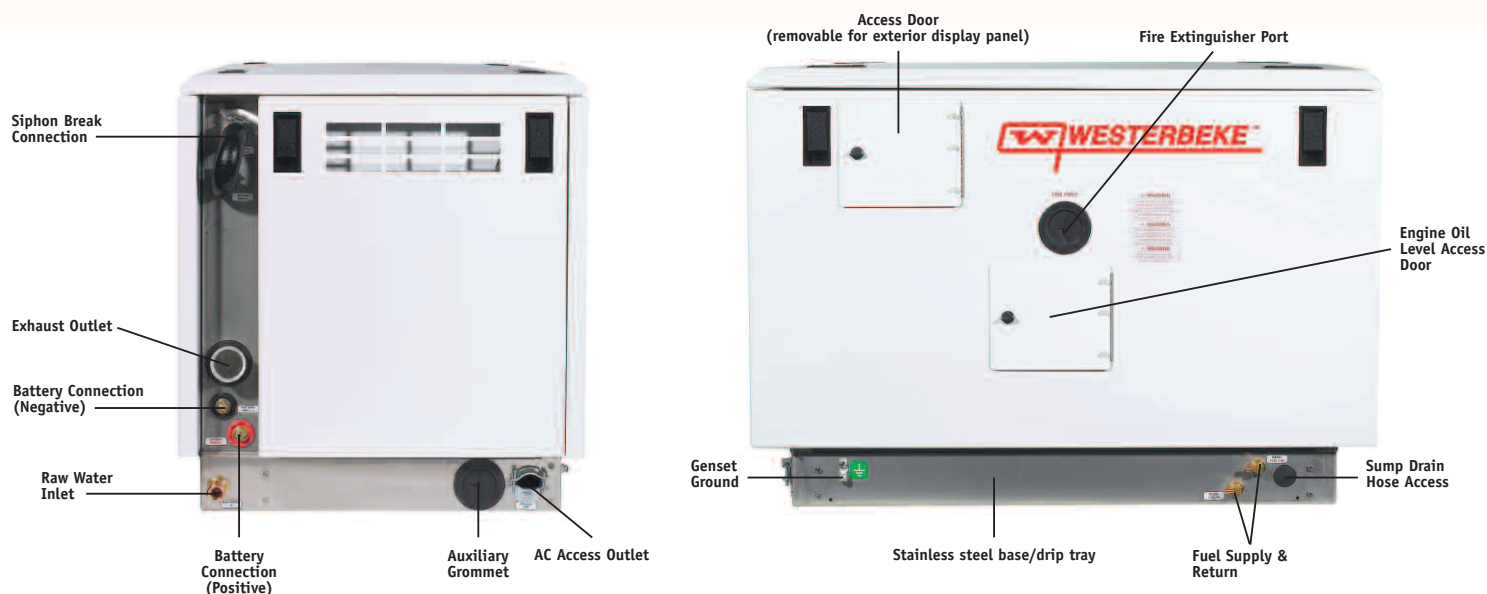



Location of some features may vary model to model.



Westerbeke Marine Gasoline Generator Sets now available with EFI low-CO technology

Pleasure, power and peace of mind

Gasoline

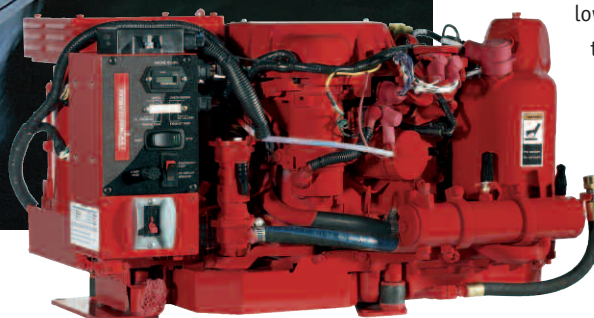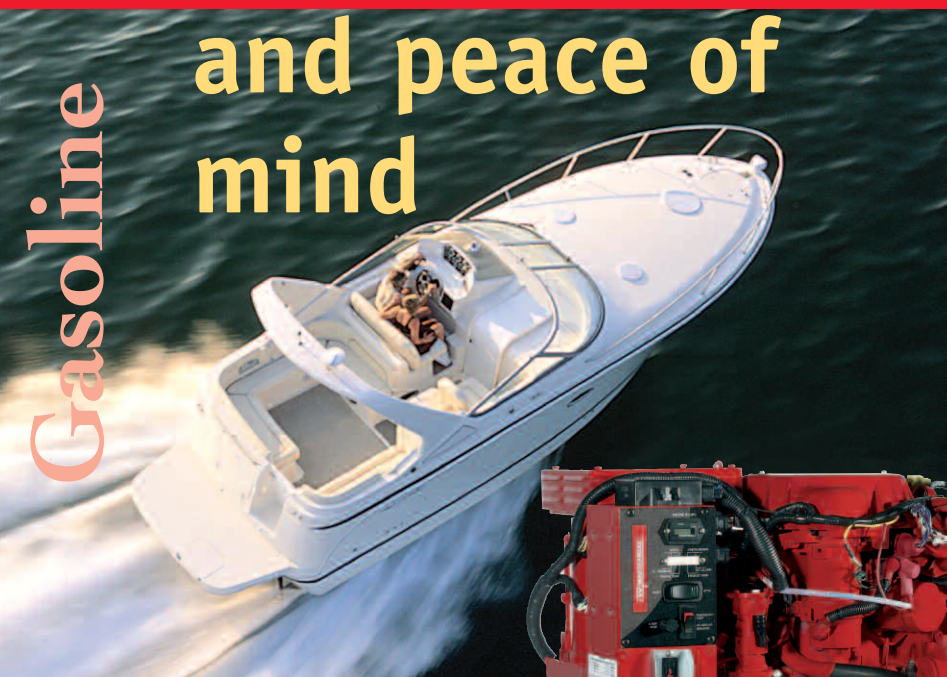

3.5 SBCG low-CO generator with multiport EFI

Providing all the comforts of home for your small pleasure craft or houseboat, Westerbeke gasoline generators are world renowned among houseboat rental fleets and small craft owners' alike.


3.5 SBCG Standard Equipment

- Simple, "one touch" start/stop control panel with running hour meter and warning annunciation
- Multiport Electronic Fuel Injection and low-CO emissions
- Safety shut-downs – overspeed, underspeed, low oil pressure, high exhaust and coolant temperature
- A.C. circuit breaker
- Battery charger
- Fresh water cooling
- Water injected exhaust elbow
- Belt-driven, raw water pump
- Vibration mounts
- Lube oil drain hose
- Belt guards
- Operators' manual and parts list
- Meets U.S.C.G. regulation 33CFR-183

QUIETLY LEADING THE WAY

'Low Profile' Generators

Westerbeke's 'Low Profile' BCG and BCGD generators are some of the smallest gasoline units on the market when compared with generators of the same kilowatt. These "low profile" 3-cylinder generators, incorporate engines that operate at 1800/1500-rpm and are quieter than 2-cylinder, 3600/3000-rpm competitors while also offering a similar envelope.

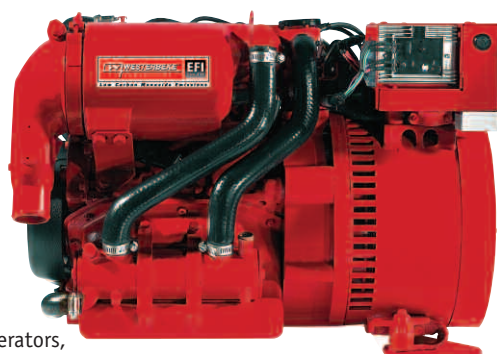

'Low Profile' Standard Equipment

- Simple start/stop control panel with running hour meter
- Quiet, 1800/1500-rpm operation
- Field adjustable to 50 or 60Hz
- Electronic governing
- 12 amp battery charger
- AC circuit breaker
- Overspeed protection
- Safety shut-downs - high coolant temperature, low oil pressure & high exhaust temperature
- Water injected exhaust elbow
- Fresh water cooling & coolant recovery tank
- Belt-driven, raw water pump
- Belt guard
- Lube oil drain hose
- Vibration isolators
- Operators' manual & parts list
- Meets U.S.C.G. regulation 33CFR-183

'EFI low-CO' models

Standard Equipment, in addition, includes:


- One touch start/stop control panel with hourmeter as well as oil pressure, engine & exhaust temperature and overspeed indicator lights.*
- Electronic fuel injection (EFI) and low-CO emissions

**EFI low-CO panel offered instead of standard 'low profile'.*



'Houseboat Series' Generators

Now available with EFI low-CO technology, Westerbeke's 'Houseboat Series' gasoline generators boast a reputation for reliability, innovation and peace of mind that extends from North America to Australia among houseboat rental fleets. Running at a slow and quiet 1800/1500-rpm, these generators are virtually forgotten in your houseboat so you can feel at home on the water.

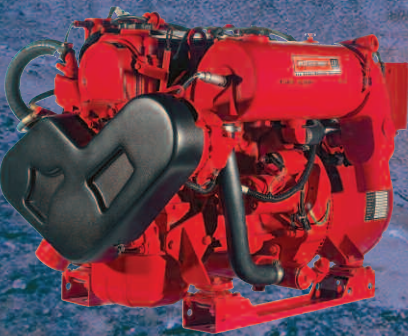

Standard Equipment

- Simple start/stop control panel with running hour meter
- Quiet, 1800/1500-rpm operation
- Field adjustable to 50 or 60Hz
- Electronic voltage regulation
- 50 amp battery charging alternator
- AC circuit breaker
- Overspeed protection
- Safety shut-downs - high coolant temperature, low oil pressure & high exhaust temperature
- Water injected exhaust elbow
- Fresh water cooling & coolant recovery tank
- Belt-driven, raw water pump
- Belt guard
- Lube oil drain hose
- Vibration isolators
- Operators' manual & parts list
- Meets U.S.C.G. regulation 33CFR-183

EFI low-CO Houseboat Series' Standard Equipment, in addition, includes:

- One touch start/stop control panel with hourmeter as well as oil pressure, engine & exhaust temperature and overspeed indicator lights*
- Electronic fuel injection (EFI) and low-CO emissions
- Electronic governing

**EFI low-CO panel offered instead of standard 'Houseboat Series' panel.*

Technical Data

Model:		5.0 BCG	4.2 BCG	7.0 BCGD	5.8 BCGD	8.0 BEG	6.4 BEG	10.0 BEG	8.0 BEG	12.5 BEG	10.0 BEG	15.0 BEG	12.0 BEG
Output	kW	5.0	4.2	7.0	5.8	8.0	6.4	10.0	8.0	12.5	10.0	15.0	12.0
Cylinders		3		3		4		4		4		4	
Speed	RPM	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500
Voltage	V	120	230	120	230	120/240	230	120/240	230	120/240	230	120/240	230
Frequency	Hz	60	50	60	50	60	50	60	50	60	50	60	50
Power Factor		1		1		1		1		1		1	
Standard phase		1		1		1		1		1		1	
Dimensions,													
Length	inches	25.2		26.2		32.6		33.8		34.8		36.1	
Width	inches	15.4		15.5		20.8		20.8		20.8		20.8	
Height	inches	16.9		16.9		23.5		23.5		23.5		23.5	
Length	mm	640		666		828		859		884		917	
Width	mm	391		394		528		528		528		528	
Height	mm	429		429		597		597		597		597	
Dry weight	lbs	307		336		440		466		497		525	
Dry weight	kg	139		152		200		211		225		238	



EFI low-CO GASOLINE GENERATORS																	
Model:	3.5 SBCG*	5.0 SBCG	4.2 SBCG	6.5 SBCG	5.4 SBCG	8.0 SBEG	6.4 SBEG	10.0 SBEG	8.0 SBEG	12.5 SBEG	10.0 SBEG	14.0 SBEG	11.6 SBEG	20.0 SBEGA	16.0 SBEGA	22.5 SBEGA	18.0 SBEGA
Output	kW	3.5	5.0	4.2	6.5	5.4	8.0	6.4	10.0	8.0	12.5	10.0	14.0	11.6	20.0	16.0	22.5
Cylinders		2	3		3		4		4		4		4		4		4
Speed	RPM	2200	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800	1500	1800
Voltage	V	120 230	120 230	120 230	120 230	120 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230	120/240 230
Frequency	Hz	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50	60 50
Power Factor		1	1		1		1		1		1		1		1		1
Standard phase		1	1		1		1		1		1		1		1		1
Dimensions,																	
Length	inches	27.1	26.6		26.8		32.6		33.8		34.8		36.6		42.3		42.3
Width	inches	16.9	20.3		20.4		21.8		21.8		21.8		21.8		24.3		24.3
Height	inches	14.8	16.9		16.9		25.1		25.1		25.1		25.1		27.9		27.9
Length	mm	688	676		681		828		859		884		930		1074		1074
Width	mm	429	516		518		554		554		554		554		617		617
Height	mm	376	429		429		597		597		597		597		716		716
Dry weight	lbs	188	351		381		438		463		495		522		741		771
Dry weight	kg	85	159		173		199		210		225		237		336		350

**3.5 SBCG not field convertible.
Specifications subject to change without notice.*

Cool. Warm. Dry. All at your fingertips

Westerbeke Airconditioning Systems

Quick, quiet cooling in hot weather, warmth in cold weather


Enjoy the luxury of a cool comfortable cabin in your boat even on the hottest summer day. Instant air conditioning at your fingertips.

An added feature, the Rotary Aire Marine Climate Control System by Westerbeke also allows you to warm the cabin with a push of a button. Perfect for warming a cabin on cool nights, or for those extreme spring/autumn temperature changes.

The Rotary Aire Marine Climate control System also acts as a very efficient dehumidifier.

It can be set to automatically remove excess humidity from the cabin even when the boat is left closed up for long periods of time, eliminating the oppressive stickiness and damp mustiness common on boats.



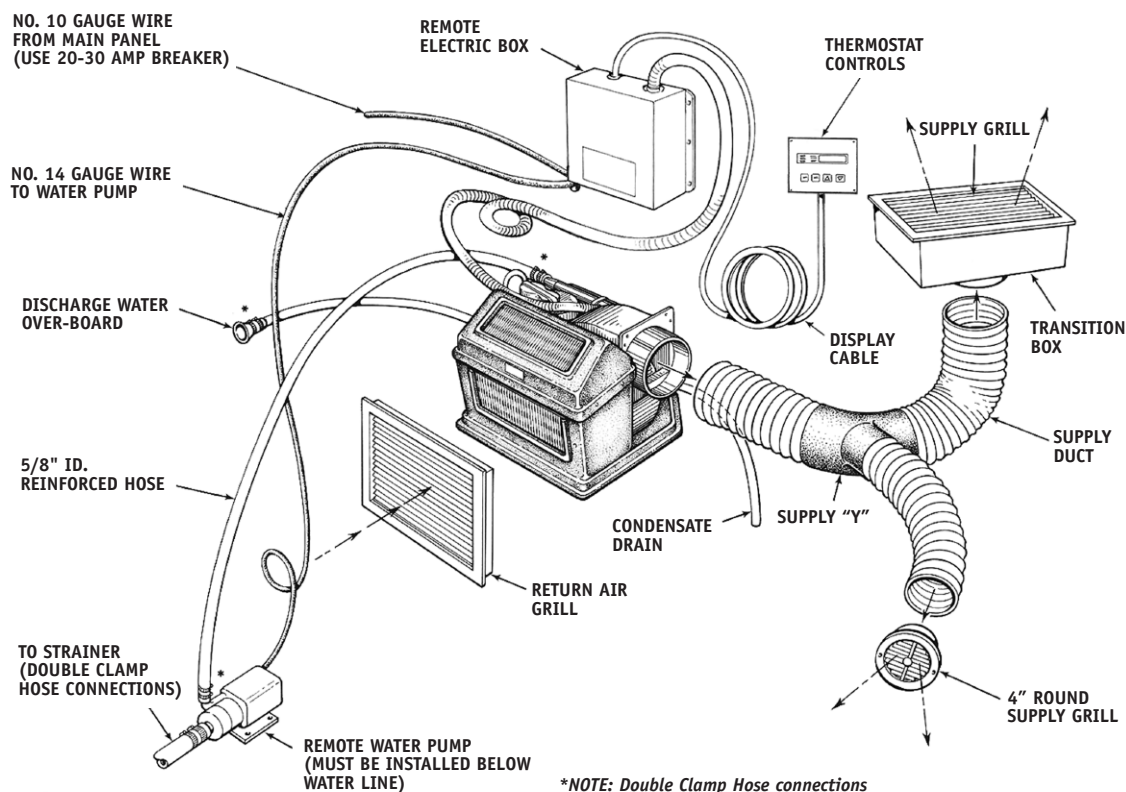

System Layout

PROVIDES BOAT OWNERS WITH YEAR ROUND COMFORT

All-weather comfort at your fingertips

For over 70 years, Westerbeke Corporation has been manufacturing world-class marine products. Westerbeke marine generators and engines are standard equipment on boats built by many of the world's leading boat

builders. Thousands of "Westerbekes" have been in faithful service over the past century. Rotary Aire Marine Climate Control System is the technical result of that marine experience. A state-of-the-art system, remarkably quiet and efficient, designed to provide the boat owner with the ultimate in personal comfort.

Technical Data

	Model 10,000	Model 17,000
Cooling capacity (BTU)	10,000	17,000
Starting Amps – 220 Volt 50Hz.	14	17.5
Running Amps	4.5 (Cooling mode) 6.0 (Heating mode)	5.0 (Cooling mode) 6.5 (Heating mode)
Starting Amps – 120 Volt 60Hz.	21	26
Running Amps	8.0 (Cooling mode) 10.0 (Heating mode)	10.0 (Cooling mode) 12.0 (Heating mode)
Net weight	55 lbs (25kg)	63 lbs (29kg)
Refrigerant (407C)	9 oz (0.38)	13 oz (0.48)
Evaporator Coil	Full Flow "V" Design	
Housing Construction	ABS Plastic	
Compressor	Rotary, only 3 moving parts	
Condensing Coil	Copper nickel	
Sea water flow	(LPH) 1136 minimum (GPH) 300 minimum	1893 minimum 500 minimum
Limited Warranty	Two years	
Dimensions L x W x H	(inches) 20.50 x 13.75 x 13.25 (mm) 521 x 350 x 337	21.25 x 16.50 x 13.50 540 x 420 x 343
Remote control box L x W x H	(inches) 6.5 x 6.75 x 2.5 (mm) 165 x 172 x 64	

Specifications subject to change without notice.


High torque low rpm




Westerbeke Marine Propulsion engines

State-of-the-Art Marine Propulsion

With over 70 years experience with marine diesel engines and a support network that's unmatched, it's easy to see why Westerbeke is still the prevailing leader in marine diesel engines. Exclusively designed for marine applications and backed by a 5-year limited warranty, these engines represent a breakthrough in compactness, quietness, and reliability. Backed by a five-year limited warranty and used by the most prestigious auxiliary sailboat builders, thousands of engines have been installed in boats for pleasure, commercial and government use.

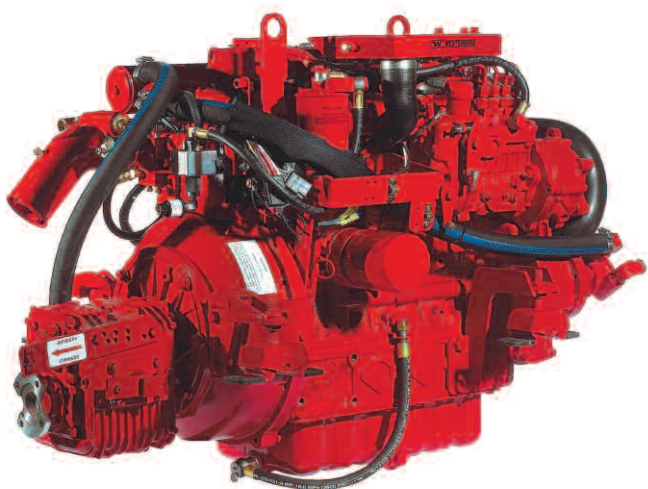

THE LEGEND CONTINUES

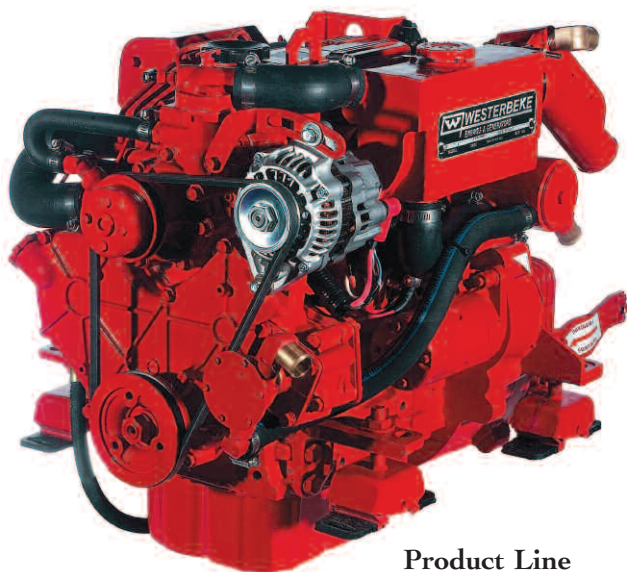

Product Line

You can choose from six Westerbeke diesel models and two Universal diesel models ranging from 12 to 66 HP

Dedication to Service


Westerbeke has managed to incorporate over 65 master distributors and their dealers worldwide to assist in the service of our quality products. Our distributors and dealers are dedicated to the consistent evolution of our product line as well as making sure that every customer is taken care of in the most efficient way possible. Whether it's parts, warranty, or technical service, you will always find a local Westerbeke distributor or dealer close by who can help.






Standard Equipment

- Fresh water cooling • Engine pre-wired to plug-in connection
- Self-bleeding fuel system on most Westerbeke models
- Domestic hot water connection • 12V, 50 amp alternator (72 amp, 65B Four)
- Coolant recovery tank • Throttle, shift and control brackets
- Low oil pressure & high water temperature alarms
- Transmission • Glow plug cold starting aid
- Engine matched, four point, fail-safe adjustable mounts • Circuit breaker protected electrical system
- Lube oil drain hose • Operators' manual & parts list

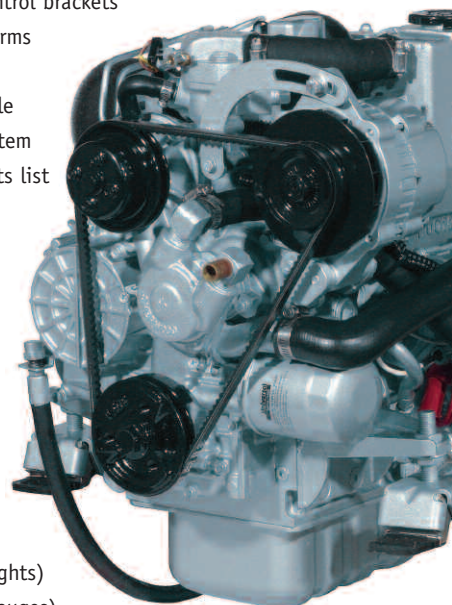

CONTINUOUS QUALITY POWER

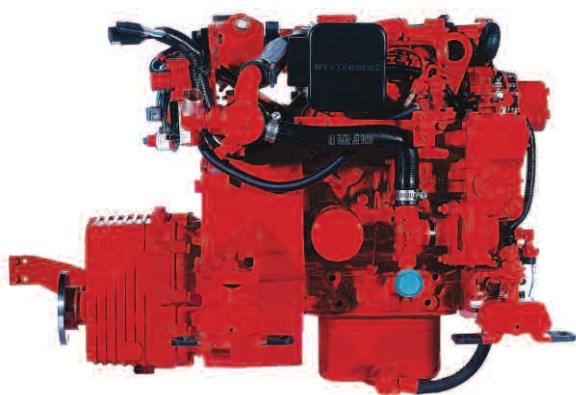


Optional Equipment

- Captain panel with alarms (tachometer with lights)
- Admiral panel with alarms (tachometer with gauges)
- 15 foot (4.6 meter) extension harness • Dual station senders
- Other gear ratios—consult local distributor • Hydraulic transmissions—consult local distributor • Remote expansion tank • Higher output alternator in place of standard on most models • Muffler and fittings
- Water injected exhaust elbows -45° deg., 90° deg. • Anti-siphon valve for overboard cooling discharge water • Propeller shaft couplings (rigid/flexible) available standard sizes • "A" on board spare parts kit
- "B" extended cruising spare parts kit • Technical Manual

Technical Data



Model	12D Two	30C Three	35E Three	44C Four	55D Four	65B Four
Power Output	12HP-9.0kW	25HP-18.7kW	28HP-20.9kW	38HP-28.3kW	48HP-35.9kW	66HP-49.2kW
Speed, RPM	3000	3600	3000	3000	2600	2600
Cylinders	2	3	3	4	4	4
Aspiration	N	N	N	N	N	N
Displacement, l	0.63	0.95	1.32	1.76	2.18	3.62
cu in	39	58	80	107	133	221

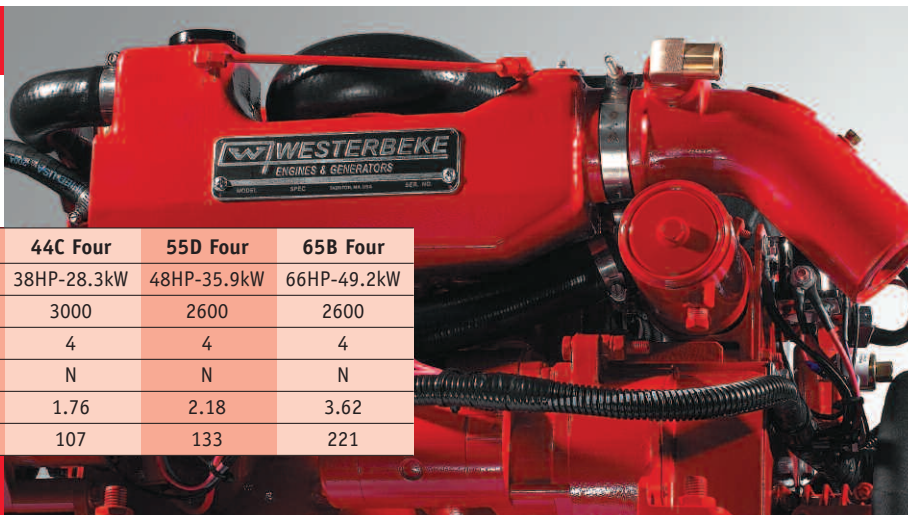

Model	M3-20B	M-25XPB
Power Output	20HP-15kW	26HP-19kW
Speed, RPM	3600	3000
Cylinders	3	3
Aspiration	N	N
Displacement, l	0.72	1.00
cu in	44	61

Atomic 4 replacement models.
Specifications subject to change without notice.



Parts Kits

Quality

Westerbeke Spare Parts and Hose Kits are packed with genuine replacement parts for your engine or generator.

Value

More for your money. Less than buying parts separately.

Assurance

Backed by our 1 year limited parts and accessories warranty.

Diesel Engines and Generators

Kit A

- Kit A Zinc (2)
- Heat Exchanger gasket
- Fuel Elements (2)
- Oil Filter
- Belt
- Fuel Hardware Kit
- Impeller and Gasket Kit



Kit B

- Zinc (2)
- Heat Exchanger Gasket
- Fuel Elements (2)
- Oil Filter
- Belt
- Fuel Hardware Kit
- Impeller and Gasket Kit
- Glow Plug
- Thermostat
- Injector
- Sea Water Pump Kit
- Complete Gasket Set

Gasoline Generators

Kit A

- Zinc (2)
- Heat Exchanger Gasket
- Oil Filter
- Belt(s)
- Impeller and Gasket Kit
- Rotor
- Spark Plugs
- *Condenser
- *Contact Set (Points)

Kit B

- Zinc (2)
- Heat Exchanger Gasket
- Oil Filter
- Belt(s)
- Impeller and Gasket Kit
- Oil Pressure Switch
- Rotor
- Spark Plugs
- Complete Gasket Set
- Thermostat
- Sea Water Pump Kit
- PCV Valve
- *Bridge Rectifier
- *Condenser
- *Contact Set (Points)



Hose Kits

Cooling Hose Kit

- Thermostat to Manifold
- Sea Water Pump to Exchanger
- Exchanger to Fresh Water Pump
- Manifold to Exchanger
- Hose Clamps
- Hoses may vary depending on model

Years Experience in the Marine Industry



WHY WESTERBEKE?

You have many choices when it comes to deciding which brand of engine, generator or air conditioner to buy, and today's technology empowers manufacturers to provide good solid products.

•

What separates Westerbeke from other brands?

•

NMMA innovation award winner two consecutive years.

•

Westerbeke has been dedicated to marine—since 1937.

•

Westerbeke offers a comprehensive line of engines and generators—we have what you need.

•

Westerbeke is committed to and driven by customer satisfaction—our #1 priority.

•

Westerbeke is engineered for reliability—we know the marine environment and design products to provide the quality our customers expect.

•

Westerbeke has an unsurpassed worldwide service network—our Master Distributor and dealer network is second to none—we support what we sell.


•

Westerbeke stands behind its products with outstanding warranty coverage—peace of mind.



Why change your footprint?

D-NET™ electronic diesel generators are also available from the factory fully networked to NMEA 2000®



NMMA Innovation Award Winner Two Consecutive Years



Westerbeke Corporation

Myles Standish Industrial Park

150 John Hancock Road, Taunton, MA 02780-7319 USA

Tel (508) 823-7677 Fax (508) 884-9688

www.westerbeke.com

