



VIKING 470 GRP 1 MOB Rescue Boat



VIKING 470 GRP 1 MOB-RESCUE BOAT

Specifically designed for life-saving and working purposes within the shipping and offshore industries.

The modern concept combined with the basic ideas of traditional boat-building principles have given the

- VIKING 470 GRP 1 man-overboard rescue boat the stability, strength, and excellent seagoing qualities required under the maritime conditions at sea.

The boat holds approvals granted by several national maritime authorities and is manufactured acc. to the international regulations of SOLAS 74, Regulation III/4, III/21, III/31 & III/34, as amended by IMO Res. MSC 48 (66) (LSA Code), IMO Res. MSC 81 (70).

Capacity: seats 5 persons + 1 person lying down.
VIKING 470 GRP 1 requires no daily maintenance nor does the type-approved hydrostatic release gear, VIKING 1.6T, which is optionally available with the boat.

Features

- Hull and inner liner made from fibre-glass reinforced, fire-retardant polyester provided with built-in polyurethane buoyancy, which makes the boat unsinkable.
- The inner liner is provided with integrated, watertight compartments for loose equipment, fuel tank, searchlight, etc.
- May be driven by one of the following approved outboard engines:
YANMAR diesel engine: 27 + 36 HP.



MARINER petrol engine: 25 + 40 + 60 HP.
YAMAHA petrol engine: 25 + 40 + 60 HP.

- Self-bailing deck, drains, bilge pump, bollards, and non-corrosive handrails and fittings.
- Provided with a single-stand lifting mast with eye (max work load 1.6 t).
- Optionally provided with a single-stand hydrostatic release gear, type VIKING 1.6T, made from acidproof, stainless steel (see illustration on back page).
- Provided with a remote-control steering system.




VIKING 470 GRP 1 MOB Rescue Boat

VIKING 470 GRP 1

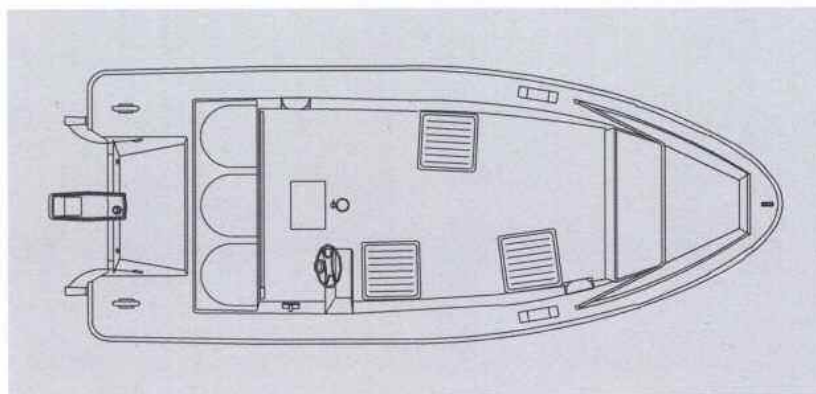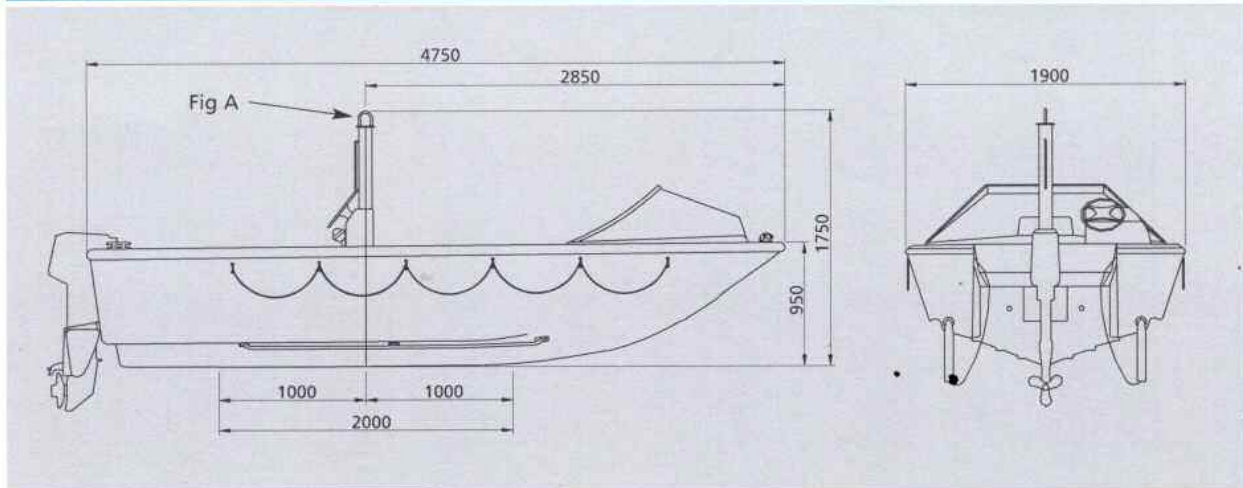

VIKING 1.6T (Fig A) - Optional

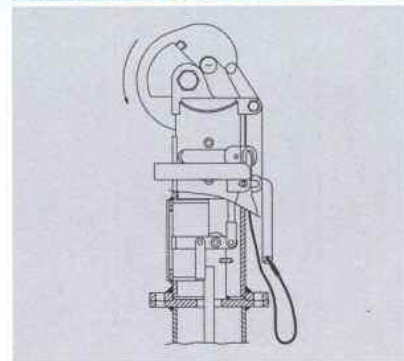

Engines – make and type approved by notified bodies

Engine/approx weight in kg	Mariner Petrol			Yanmar Diesel	
	25 hp	40 hp	60 hp	27 hp	36 hp
Rescue boat, nett:	440	440	440	440	440
Engine:	51	67	98	87	118
Fuel tank and fuel:	54	54	54	27	27
Batteries:	17	21	2x21	2x21	2x25
Equipment:	30	30	30	30	30
6 persons x 75 kg:	450	450	450	450	450
Gross:	1042	1062	1114	1076	1115
Speed capacity v/6 persons:	6.1	10.5	19.6	8.0	9.7


Specifications

Length, overall:	4,75 m
Beam, overall:	1.90 m
Operational weight, 25 HP outboard engine and standard equipment included:	592 kg
6 persons:	450 kg
Gross weight:	1042 kg

MOB 12.03 comp.A5

The VIKING group is represented in every corner of the world. Close geographical proximity to our customers is ensured by a distribution network of

subsidiaries and approx. 270 VIKING authorized servicing stations located in strategically important sales and servicing points and markets.



Specifications are subject to change without prior notice

For more information on nearest VIKING subsidiary/branch – please contact:
+45 76 11 81 00 or visit our homepage: www.viking-life.com